


Chair Positions: RH Switches


Notes:

1. The special switch chairs are designated 1P, 2P, 3P, etc. Looking along the turnout from the tip of the switch rails (the 'toe'), there are first a number of slide ('P') chairs (5 for an A switch, 6 for a B and 7 for a C) then the special chairs in ascending numerical order. The slide chairs sit at right angles to the rail they carry whilst the special chairs are at right angles to the straight road.
2. Timbers through the switch need to be spaced correctly for each type of switch. The spacing is between 2' 4" and 2' 6" (9.3mm and 10mm).
3. These chair mouldings are designed for use with P4 track and wheel standards and some adjustment may be needed if used with other standards.

A switch

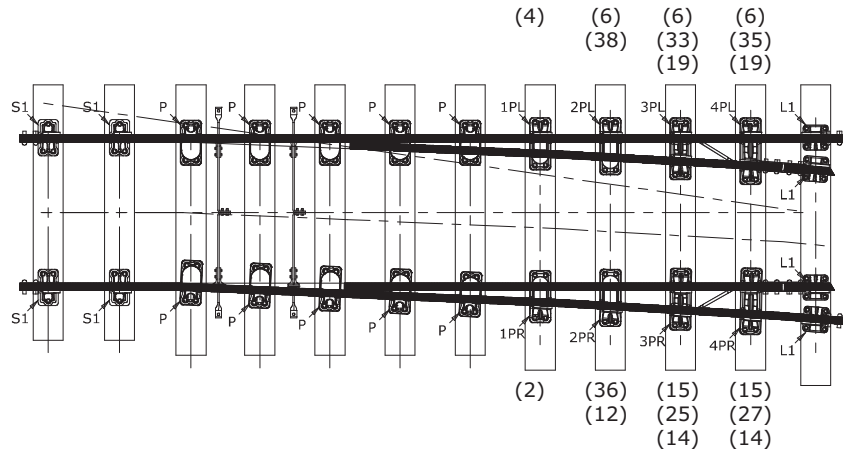

B switch

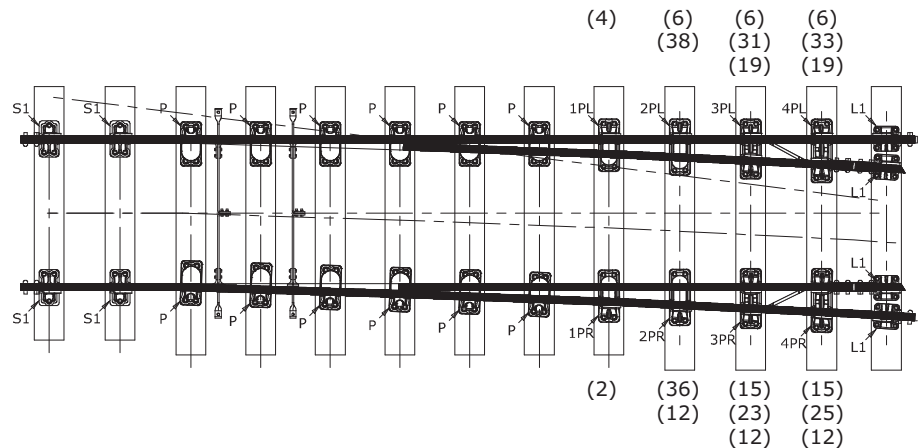

C switch

